



**Inductive sensor**  
**Bi2-K11-Y1**

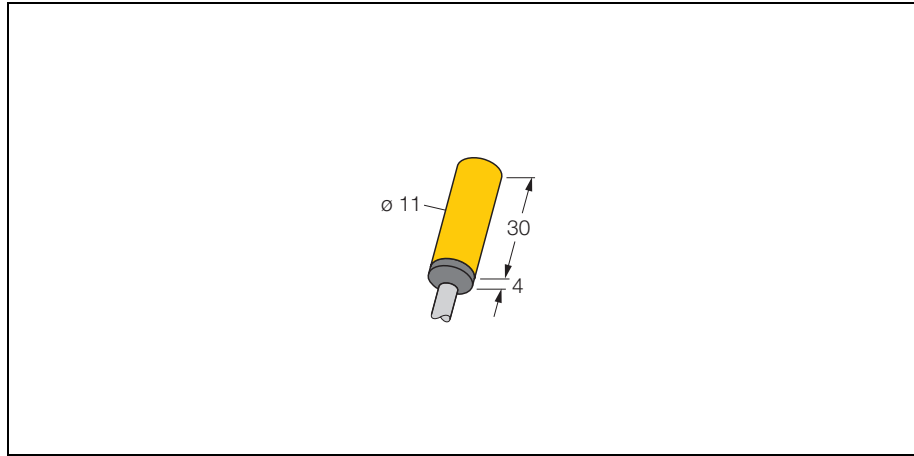

- ATEX category II 2 G, Ex zone 1
- ATEX category II 1 D, Ex zone 20
- SIL2 as per IEC 61508
- smooth barrel, 11 mm diameter
- plastic, PA12-GF30
- 2-wire DC, nom. 8.2 VDC
- Output acc. to DIN EN 60947-5-6 (NAMUR)
- Cable connection

**Wiring diagram**



**Functional principle**


Inductive sensors are designed for wear-free and non-contact detection of metal objects. For this purpose they use a high-frequency electro-magnetic AC field that interacts with the target. Concerning inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

<b>Type</b>	Bi2-K11-Y1
Ident-No.	10070
<b>Rated operating distance Sn</b>	2 mm
Mounting condition	flush
Assured sensing range	≤ (0,81 x Sn) mm
Correction factors	St37 = 1, V2A ~ 0.7, Ms ~ 0.4, Al ~ 0.3
Repeatability	≤ 2 %
Temperature drift	≤ ± 10 %
Hysteresis	1... 10 %
Ambient temperature	-25... + 70 °C
<b>Output function</b>	2-wire, NAMUR
Switching frequency	≤ 5 kHz
Voltage	Nom. 8.2 VDC
Non-actuated current consumption	≥ 2.1 mA
Actuated current consumption	≤ 1.2 mA
<b>Approval acc. to</b>	KEMA 02 ATEX 1090X issue no.3
Internal inductance (L <sub>i</sub> ) / capacitance (C <sub>i</sub> )	150 nF / 150 μH
Device designation	⊕ II 2 G Ex ia IIC T6/II 1 D Ex ia D 20 T95 °C (max. U <sub>i</sub> = 20 V, I <sub>i</sub> = 60 mA, P <sub>i</sub> = 200 mW)
<b>Housing</b>	smooth barrel, 11 mm
Dimensions	34 mm
Housing material	plastic, PA12-GF30
Material active face	plastic, PA12-GF30
Connection	cable
Cable quality	Ø 5.2, blue, LifYY, PVC, 2 m
Cable cross section:	2 x 0.34mm <sup>2</sup>
Vibration resistance	55 Hz (1 mm)
Shock resistance	30g (11 ms)
Degree of protection	IP67
<b>Included in scope of supply</b>	BS11

**Inductive sensor  
Bi2-K11-Y1**

Mounting instructions	minimum distances
Distance D	2 x B
Distance W	3 x Sn
Distance T	3 x B
Distance S	1,5 x B
Distance G	6 x Sn

**Diameter of the active area B**                       $\varnothing$  11 mm


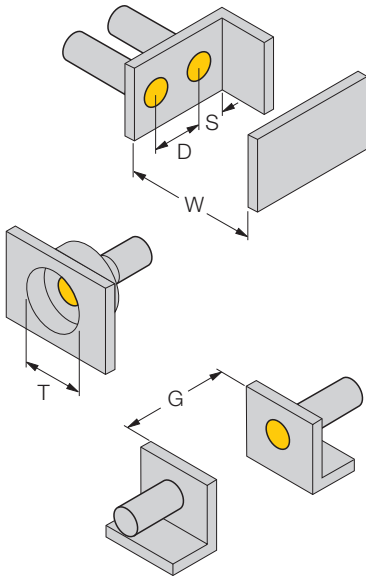


# Inductive sensor Bi2-K11-Y1

**TURCK**

Industrial  
Automation

## Accessories

Type code	Ident-No.	Short text	Dimension drawing
IM1-22EX-R	7541 231	Isolating switching amplifier, 2 channel; 2 transistor outputs; input for NAMUR signals; selectable ON/OFF mode for wire-break and short-circuit monitoring; adjustable signal flow (N.O./ N.C.mode); removable terminal blocks; 18 mm width; universal voltage supply unit	 <p>Technical drawing of the IM1-22EX-R isolating switching amplifier. It shows a perspective view of a yellow rectangular component with a black top surface. Dimensions are indicated: 104 mm height, 110 mm length, and 18 mm width.</p>
BS11	69462	fixing clamp; material mounting block: PBT	 <p>Technical drawing of the BS11 fixing clamp. It shows a perspective view of a small metal component with a circular hole. Dimensions are indicated: 12 mm height, 20 mm length, and 10 mm width. The hole diameter is 4 mm. The drawing is labeled 'M4 x 22 DIN 913'.</p>

## Inductive sensor Bi2-K11-Y1

### Operating manual

#### Intended usage

This device fulfils the directive 94/9/EC and is suited for use in explosion hazardous areas as per EN60079-0, -11 and EN61241-0, -11. Further it is suited for use in safety-related systems, including SIL2 as per IEC 61508. In order to ensure correct operation to the intended purpose it is required to observe the national regulations and directives.

#### For use in explosion hazardous areas conform to classification

II 2 G and II 1 D (Group II, Category 2 G, electrical equipment for gaseous atmospheres and category 1 D, electrical equipment for dust atmospheres).

#### Marking (see device or technical data sheet)

Ⓔ II 2 G and Ex ia IIC T6 as per EN60079-11 and Ⓔ II 1 D Ex iaD 20 T95°C as per EN60079-11 and EN61241-0 and -11

#### Local admissible ambient temperature

-25...+70 °C

#### Installation / Commissioning

These devices may only be installed, connected and operated by trained and qualified staff. Qualified staff must have knowledge of protection classes, directives and regulations concerning electrical equipment designed for use in explosion hazardous areas. Please verify that the classification and the marking on the device comply with the actual application conditions.

This device is only suited for connection to approved Exi circuits compliant to EN60079-0 and -11. Please observe the maximum admissible electrical values. After connection to other circuits the sensor may no longer be used in EExi installations. When interconnected to (associated) electrical equipment, it is required to perform the "Proof of intrinsic safety" (EN60079-14). When employed in safety systems to IEC 51408 it is required to assess the failure probability (PFD) of the complete circuitry.

#### Installation and mounting instructions

Avoid static charging of cables and plastic devices. Please only clean the device with a damp cloth. Do not install the device in a dust flow and avoid build-up of dust deposits on the device. If the devices and the cable could be subject to mechanical damage, they must be protected accordingly. They must also be shielded against strong electro-magnetic fields. The pin configuration and the electrical specifications can be taken from the device marking or the technical data sheet.

#### Repair / maintenance

Repairs are not possible. The approval expires if the device is repaired or modified by a person other than the manufacturer. The most important data from the approval are listed.