


**analogue signal transmitters**  
**1-channel**  
**IMS-AI-DU-Di/24VDC**

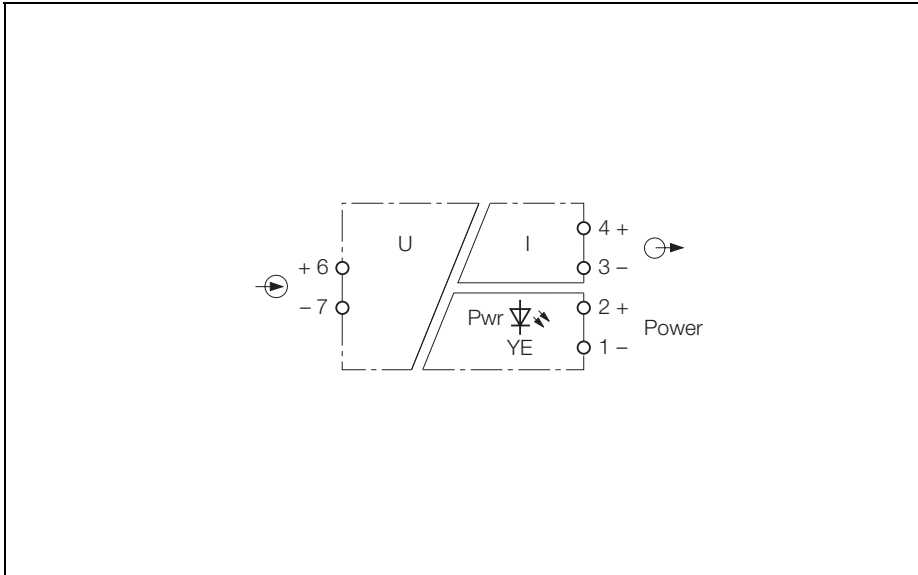

Standard, active voltage signals are galvanically isolated, transmitted and converted to standard current signals via the 1-channel analog data transmitter IMS-AI-DU-DI/24VDC.

The device features one input circuit 0/2...10 V mA and one short-circuit protected output circuit 0/4... 20mA. Input circuit, output circuit and supply voltage are each

galvanically isolated.

The input signals are linear converted and transmitted to the output.

A green LED indicates operational readiness.

Das Gerät bietet bei einer Baubreite von 6,2 mm eine galvanische Trennung bis zu 1,5 kV.



- **analogue signal transmitters**
- **6.2 mm width**
- **1-channel analogue signal transmitter**
- **Input circuit 4...10V**
- **Output signal 0...20mA**
- **Linearity <0,1% of full scale**
- **Accuracy <0,1% of full scale**
- **Galvanic isolation of input circuits, output circuits and supply voltage**

## analogue signal transmitters

### 1-channel

### IMS-AI-DU-Di/24VDC

<b>Type</b>	IMS-AI-DU-Di/24VDC
Ident-No.	7504001
<b>Nominal voltage</b>	24 VDC
Operational voltage range:	19 ... 29 VDC
Power consumption	≤ 0.312 W
Residual ripple	≤ 5 mV <sub>ss</sub>
<b>Voltage input</b>	
Voltage	0...10 VDC
Input resistance	330 kΩ
<b>Output current</b>	
Load resistance current output	0...20 mA ≤ 0.4 kΩ
<b>Limit frequency</b>	< 30 Hz
Rise time (10-90%)	10 ms
Dropout time (90...10%)	10 ms
Measuring accuracy	≤ 0.1 % of full scale
Linearity deviation	≤ 0.1 % of full scale
Temperature drift	≤ 0.00015 % / K
<b>Test voltage</b>	
Constant voltage supply	1.5 kV 50 V
<b>Indication</b>	placeholder
Operational readiness	green
<b>Mechanical Data</b>	
Degree of protection	IP20
Ambient temperature	-20 ... + 60 °C
Housing length	92.5 mm
Housing width	6.2 mm
Housing height	90 mm
Weight	60 g
Mounting instruction	mounting on a DIN rail
Housing material	polycarbonate/ABS
Electrical connection	screw terminals
Terminal cross-section	2.5 mm <sup>2</sup>

#### Dimensions

