


analogue signal transmitters

1-channel

IMS-AI-Di-Li/24VDC

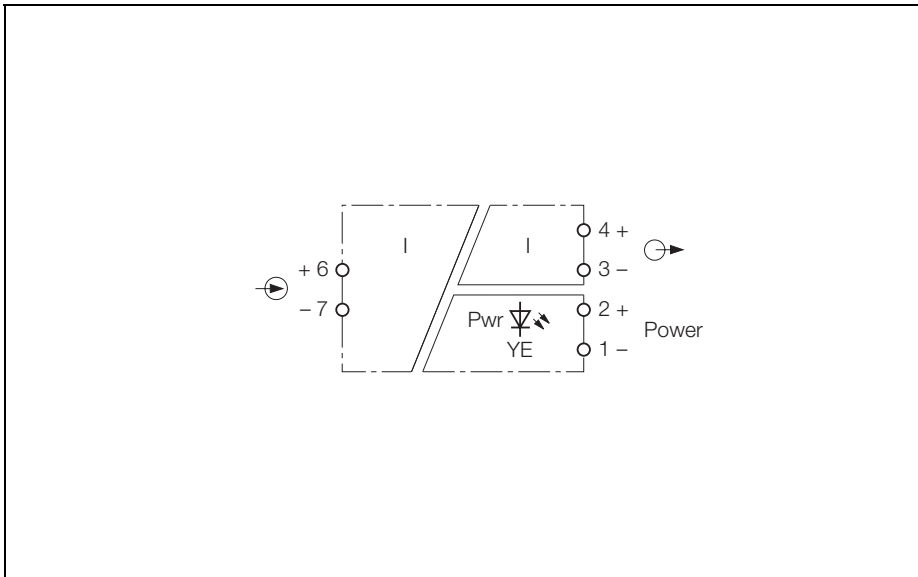

Standard, active voltage signals are galvanically isolated, transmitted and converted to standard current signals via the 1-channel analog data transmitter IMS-AI-DI-LI/24VDC.

The device features one input circuit 0... 20 mA and one short-circuit protected output circuit 4...20 mA. Input circuit, output circuit and supply voltage are each galvanically isolated.

The input signals are linear converted from a dead-zero signal to a life-zero signal and transmitted to the output.

A green LED indicates operational readiness.

Das Gerät bietet bei einer Baubreite von 6,2 mm eine galvanische Trennung bis zu 1,5 kV.



- analogue signal transmitters
- 6.2 mm width
- 1-channel analogue signal transmitter
- Input circuit 0...20mA
- Output signal 4...20mA
- Linearity <0,1% of full scale
- Accuracy <0,1% of full scale
- Galvanic isolation of input circuits, output circuits and supply voltage

analogue signal transmitters

1-channel

IMS-AI-Di-Li/24VDC

TURCK
works

Industrial
Automation

Type	IMS-AI-Di-Li/24VDC
Ident-No.	7504005
Nominal voltage	24 VDC
Operational voltage range:	19 ... 29 VDC
Power consumption	≤ 0.312 W
Residual ripple	≤ 5 mV _{ss}
Current input	
Current input	0-20 mA
Input resistance	100 Ω
Output current	
Load resistance current output	4...20 mA ≤ 0.4 kΩ
Limit frequency	< 30 Hz
Rise time (10-90%)	10 ms
Dropout time (90...10%)	10 ms
Measuring accuracy	≤ 0.1 % of full scale
Linearity deviation	≤ 0.1 % of full scale
Temperature drift	≤ 0.00015 % / K
Test voltage	1.5 kV
Constant voltage supply	50 V
Indication	placeholder
Operational readiness	green
Mechanical Data	
Degree of protection	IP20
Ambient temperature	-20 ... + 60 °C
Housing length	92.5 mm
Housing width	6.2 mm
Housing height	90 mm
Weight	59 g
Mounting instruction	mounting on a DIN rail
Housing material	polycarbonate/ABS
Electrical connection	screw terminals
Terminal cross-section	2.5 mm ²

Dimensions

